


GEDORE

TOOLS FOR LIFE



11/2019

Track Rod End Removal Socket

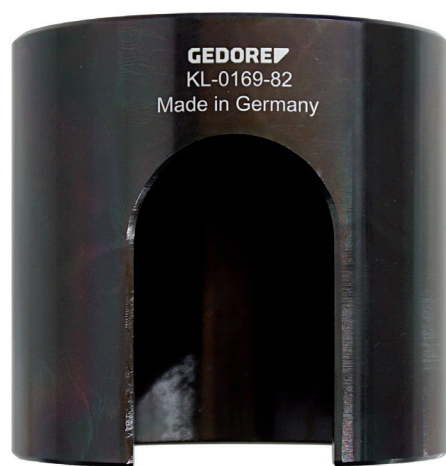

KL-0169-82



EN

www.gedore-automotive.com

GEDORE Automotive GmbH

Breslauer Straße 41
78166 - Donaueschingen
Postfach 1329
78154 Donaueschingen - GERMANY

T +49 (0) 771 / 8 32 23-0
F +49 (0) 771 / 8 32 23-90
info.gam@gedore.com
www.gedore-automotive.com

GEDORE TOOLS, INC.

Only for USA, Canada & Mexico
Sólo para EE.UU., Canadá y México
Seulement pour les USA, le Canada et le Mexique
7187 Bryhawke Circle, Suite 700
North Charleston, SC 29418, USA
Phone +1-843 / 225 50 15
Fax +1-843 / 225 50 20
info@gedoretools.com

GEDORE WELTWEIT / GEDORE WORLDWIDE

Weltweite GEDORE Servicestellen / Niederlassungen finden Sie im Internet unter: www.gedore.com
Worldwide GEDORE service centers / offices are listed on the Internet at: www.gedore.com

0169-82e191010.indd

Version 1.

KL-0169-82 Track Rod End Removal Socket

If you have any questions, please contact:
GEDORE Automotive GmbH
Breslauerstr. 41 // 78166 Donaueschingen
Tel.: 0771 8 32 23 71 // E-Mail: info.gam@gedore.com

Universally applicable to track rod ends found in HGVs/LGVs, buses and tractors.

For example: MAN, Mercedes-Benz, Neoplan, Renault Trucks, Iveco, Scania, Volvo, DAF, Deutz-Fahr, IHC, Case IH, JCB, Evobus and Kässbohrer.

For the quick and professional removal and installation of track rod ends. Required to loosen and release the track rod end from the track rod properly when adjusting/changing the track rod end for example.

The heavy-duty socket slips over the complete track rod end, thus enabling a great amount of force to be applied with the aid of a 3/4" ratchet. Thus, even stiff or corroded track rod ends are no longer an issue.

Thanks to this tool, the expensive replacement of the complete track rod / drag link can be avoided.



Technical Data:

- Drive:..... 3/4"
- Height (internal): 70mm
- Diameter (internal): 80mm
- U-shaped slot: 65 x 40mm
- Height (external): 90mm
- Diameter (external):..... 95mm

Example of use:



⚠ Warnings and Notes:

- Before using the tool, carry out a visual check to make sure that it is not damaged.
- Always refer to the vehicle manufacturer's data and instructions as only these apply to all work that is carried out on the vehicle.
- All vehicle-specific data stated herein are supplied under reserve and without commitment.